

# Duraklick

## Mountingsystem East-West

# EW



The Duraklick-EW mounting system was developed for maximum yields with maximum utilization of space. It ensures significantly more even yields on flat roofs and impresses with a first-class price-performance ratio.

The outstanding system properties such as simple installation, the click system, the lightweight aluminum composite construction and the excellent load distribution due to the 230mm wide base profile are, of course, also features of this system. With a module inclination of 10°, it is ideal for roofs with foil or bitumen surfaces, because it is installed without roof penetration and requires no or only a slight load.

Other module inclinations on request!

### Convincing features:

- ▶ Simple and safe
- ▶ Tested and approved up to windzone IV
- ▶ Corrosion resistant and statically tested
- ▶ Tested by the Deutsches Institut für Bautechnik and approved by the building authorities under the number Z 14.4-691 since 2015
- ▶ Compatible with the height safety system Duraklick HSS
- ▶ Made in Germany



building authority approval  
DIBt  
Nr. Z 14.4-691


# Duraklick

# EW

## Mountingsystem East-West

### EW 10°

...for PV modules with a width of 850 -  
1200mm and 10° inclination

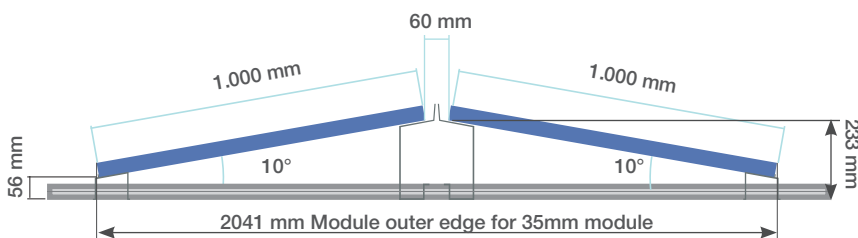

#### Technical description

Inclination	10°
Rail length	0,3 - 6,0 m
Module width	850 - 1200 mm
Surface load	ca. 13,1 kg/m <sup>2</sup> *
Line load	ca. 21,6 kg/m *
Material	Aluminium / Edelstahl

\* with a module weight of 19 kg and a skip of 2.35m  
without additional ballast



**SOLTOP**  
renewable energy

SOLTOP EU GmbH  
Sonnenhalde 5  
D-88161 Lindenberg  
www.soltop.eu

Hauptsitz Schweiz:  
SOLTOP Schuppisser AG  
St. Gallerstrasse 3 + 5a  
CH-8353 Elgg  
www.soltop.ch

Sitz der Gesellschaft:  
Lindenberg  
Registergericht: Kempten  
(Allgäu)  
Geschäftsführer:  
Andreas Zimmerer

Handelsregister: HRB 14331  
MwSt: 127/137/60143  
UID: DE300491338  
EORI: DE314291943832627